

OFF-THE-ROAD TIRES



VSNT (E4/L4)

V-STEEL N-TRACTION

VSDT (L5)

V-STEEL SUPER-DEEP TRACTION



MAIN FEATURES

- Excellent traction
- Superb side-cut resistance
- Better riding comfort
- Long tread life
(L4/L5 tread class)

VSDT/VSNT OFF-THE-ROAD TIRES

Tire size			
VSNT (E4/L4)		VSDT (L5)	
26.5R25	29.5R25	23.5R25	26.5R25
29.5R29	35/65R33	29.5R25	29.5R29
		35/65R33	

BRIDGESTONE OFF-THE-ROAD TIRES

VSNT V-STEEL N TRACTION (E4/L4)

VSDT V-STEEL SUPER-DEEP TRACTION (L5)

Excellent traction

0% worn



Optimal lug angle achieves powerful traction for both tipping and drive-in/-out.

75% worn




Uniform groove depth ensures excellent traction throughout the life of the tire.





Better riding comfort

Optimal lug face ensures equal load distribution and even contact area, providing virtually vibration-free driving on all surfaces (particularly on hard-packed or asphalt roads).

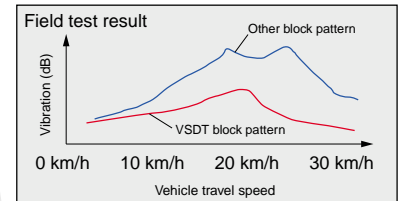

Superb side-cut resistance




New square shoulder design pushes objects aside, protecting the side wall from cuts and damage.

Groove stone ejectors



Take a close look at the small nubs in the grooves of the VSDT/VSNT tires. They push out stones trapped in the grooves, preventing them from drilling into the tire.

They push out stones trapped in the grooves, preventing them from drilling into the tire.

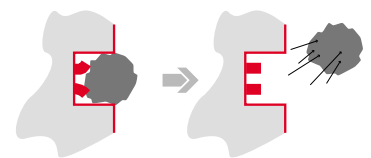

VSNT (E4/L4)

Tire Size	Star Rating	Type*	Recommended Rim/FI height	Approximate Inflated Dimensions								
				OD		OW		SLR**		SLW**		OTD
				inch	mm	inch	mm	inch	mm	inch	mm	
26.5R25 (E4/L4)	MS	T/L	22.00/3.0	70.0	1779	26.8	680	31.5	799	29.1	740	57.5
29.5R25 (E4/L4)	MS	T/L	25.00/3.5	75.0	1905	30.2	768	33.4	849	32.9	835	60.0
29.5R29 (E4/L4)	MS	T/L	25.00/3.5	78.7	2000	30.5	774	35.6	905	34.6	849	60.0
35/65R33 (E4/L4)	MS	T/L	28.00/3.5	81.7	2075	35.6	904	36.9	936	38.4	976	62.5
35/65R33 (L4)	*2	T/L	28.00/3.5	81.7	2075	35.6	904	36.9	936	38.4	976	62.5

VSDT (L5)

Tire Size	Star Rating	Type*	Recommended Rim/FI height	Approximate Inflated Dimensions								
				OD		OW		SLR		SLW		OTD
				inch	mm	inch	mm	inch	mm	inch	mm	
23.5R25	*1 *2	T/L	19.50/2.5	65.4	1660	24.4	621	29.3	745	26.8	680	79.0
26.5R25	*1 *2	T/L	22.00/3.0	69.9	1775	27.4	697	31.1	790	30.6	778	88.0
29.5R25	*1 *2	T/L	25.00/3.5	74.7	1898	30.7	779	33.3	845	34.2	869	96.0
29.5R29	*1 *2	T/L	25.00/3.5	78.5	1993	30.5	774	34.8	883	34.3	872	96.0
35/65R33	*1	T/L	28.00/3.5	81.7	2075	35.0	890	36.0	914	39.0	990	96.0

*T/L: Tubeless type **For earthmover use, please consult Bridgestone.

Specifications are subject to change without notice.

